



Midea Appliances Australia

Address: 7 Ordish Road Dandenong South VIC 3175
T 1300 726 002
W midea.net.au E info@midea.net.au
Midea reserves the right to change the specifications of the product, and to withdraw or replace products without prior notification or public announcement. Midea is constantly developing and improving its products.
GD MIDEA Heating & Ventilating Equipment Co. Ltd participates in the ECP programme for VRF. Check ongoing validity of certificate: WWW.eurovent-certification.com



Midea MBT

Midea MBT (Midea Building Technologies) is a key division of the Midea Group, a leading provider of comprehensive solutions for intelligent buildings. It specializes in energy sources, elevators, control systems, and heating, ventilation & air conditioning. Midea MBT continues the tradition of innovation upon which it was founded and has emerged as a global leader in the HVAC and building management industry. A strong

drive for advancement has resulted in an extensive R&D department that has placed Midea MBT at the forefront of the competition. Through independent projects and joint-cooperation with other global enterprises, Midea has supplied thousands of innovative solutions to customers worldwide.



3 businesses make up the core of Midea intelligent building solutions



4 production bases can achieve fast delivery




Over 100 testing labs cover a wide range of real application scenarios



All products can be visualized and digitalized throughout entire process



Midea VRF History

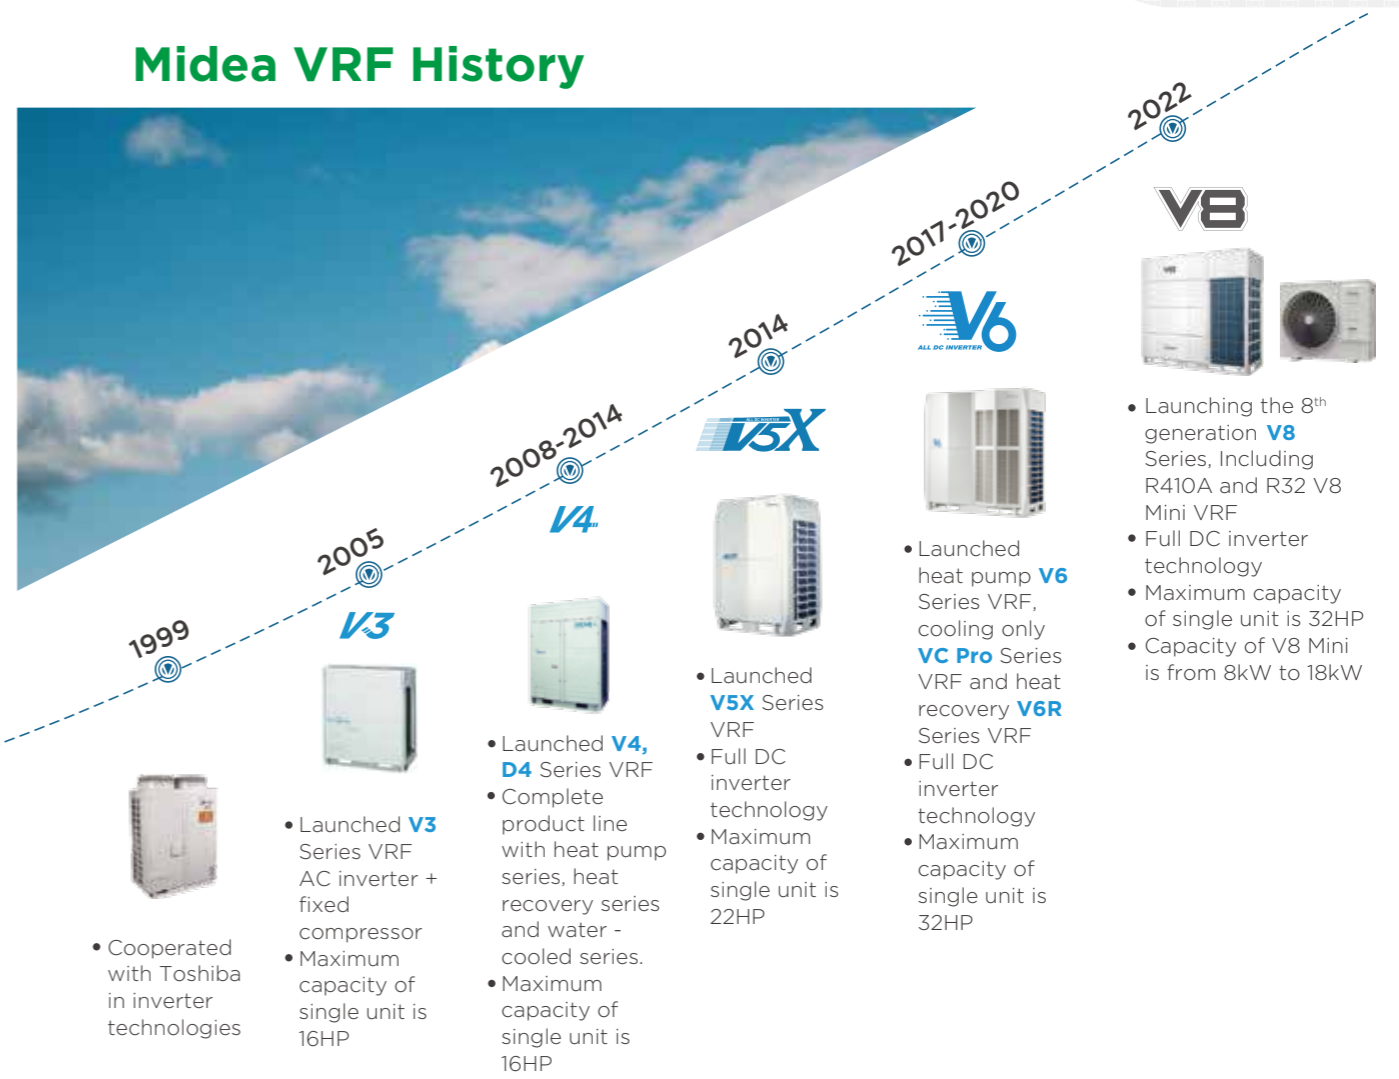

Friendly to Environment

R32

Advantages of R32 Refrigerant




- Lower GWP 675
- Zero impact on ozone layer
- Less carbon emission



- Higher heat transfer coefficient
- Less pressure loss
- No temperature glide



- Easier to get
- Less charged volume



-68%

Potential global warming impact



Benefits of Midea VRF


For End-users

Healthy Operation
Cost Saving Operation
Comfortable Environment



For Consultants

Diversified Solutions
Professional Tool and Support
Design Flexibility

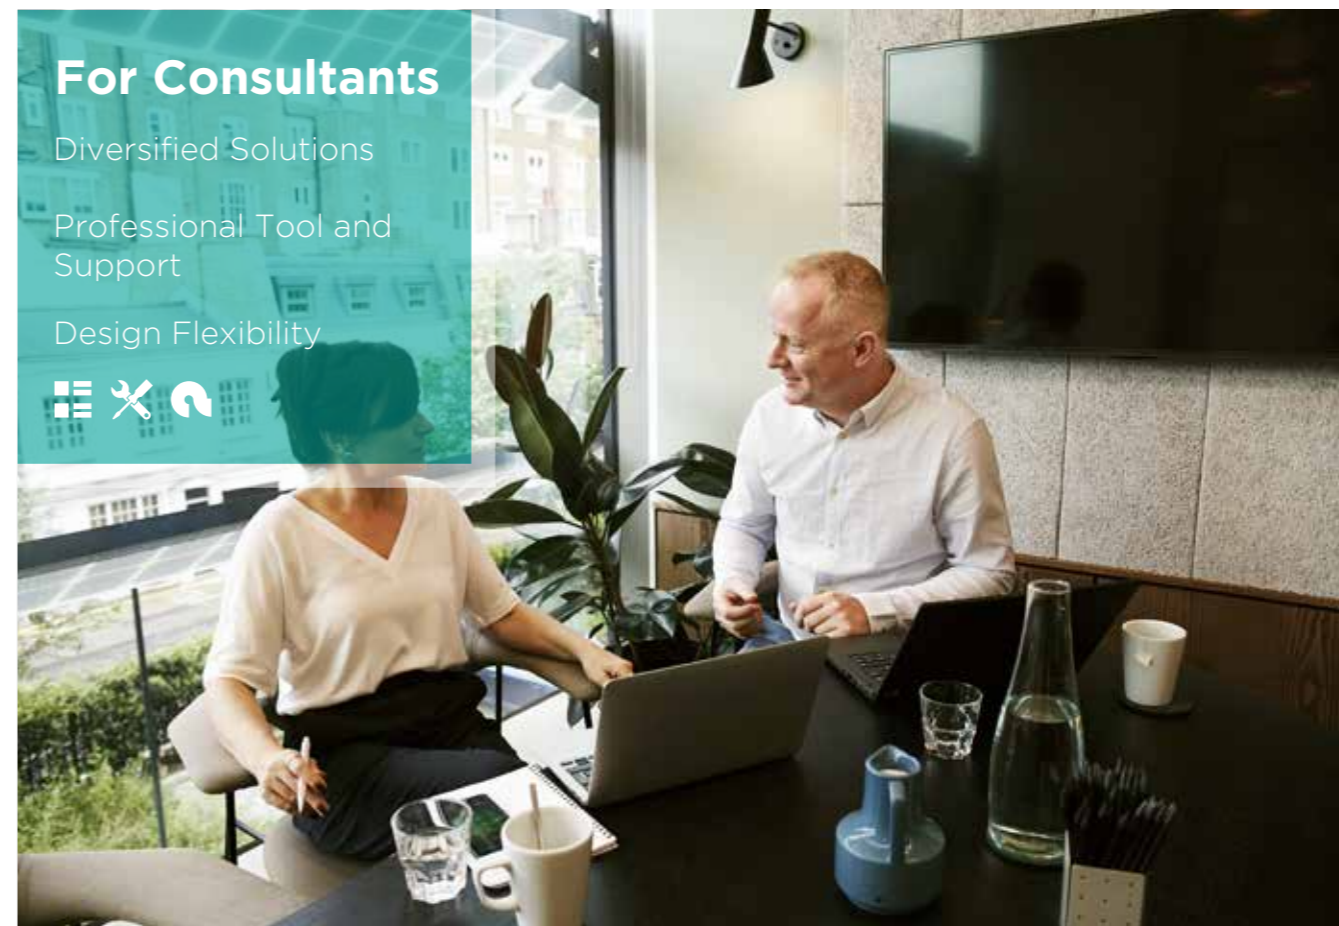

For Building Owners

Energy Saving Management
Reliable Operation
Backup Solution



For Construction Companies

Green Solutions
Space Saving Design
Intelligent Management



Application Solutions

Villas

Enjoy high quality of life

The fashionable and simple appearance perfectly matches all kinds of villa styles, and the concealed indoor unit provides you with high-quality air while perfectly integrating into all kinds of interior decoration.



Residential Apartments

One for every home

The compact size and high efficiency make Midea VRF suitable for all residential homes.



Offices

Enjoy comfort while working

Midea VRF provides solution for small to medium-sized office buildings and its smart control solutions makes the management of VRF simple and easy whereas the wide variety of indoor units are suitable for all designs.




Convenience Stores / Restaurants

Meeting all expectations

The innovative design and a variety of indoor unit choices makes Midea Mini VRF suitable for different applications.




Design Service

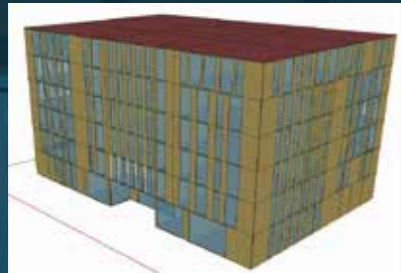

Energy Plus
Building load
calculation



BIM
building
information
import

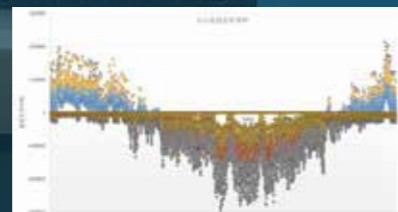


MSSP Online
VRF system design

Installation service



Automatic
commissioning
report

MCFD
Energy consumption
and airflow simulation
optimization

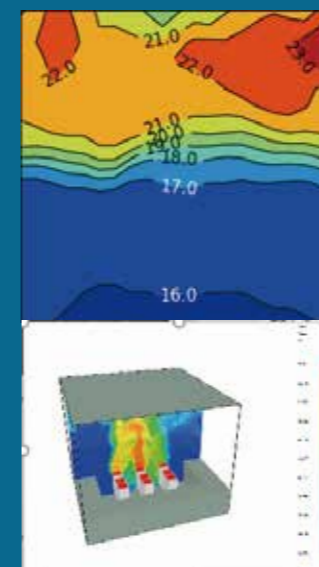

Management service



The probability of
Filth blockage 80%



Degradation of energy
efficiency 25%


Continuous energy
saving service



After-sales service



Intelligent
maintenance tool



Cloud-based big
data analytics

2 +10 +N Spare
Parts Layout can
ensure the timely
supply of global
after-sales spare
parts.



Technical Support Platform (TSP)

TSP is a platform for customers to seek professional technical support. Through TSP, you can inquire about product information, documentation, spare parts and troubleshooting, ask technical questions, submit complaints, and order spare parts.

<https://tsp.midea.com/>



My order

Inquire about spare parts from an exploded view and place orders for spare parts directly in TSP.

Document inquiry and download

View or download product technical documentation online, such as catalogs, images, training PPTs, etc.

Technical inquiry & FAQ


Ask technical questions online and receive a prompt response from our technicians. Or find a quick solution in the FAQ.

Troubleshooting

Query the error code and solution by SN, model name, error code or product type.

Complain


Submit product quality complaints online, and our after-sales engineers will respond promptly.

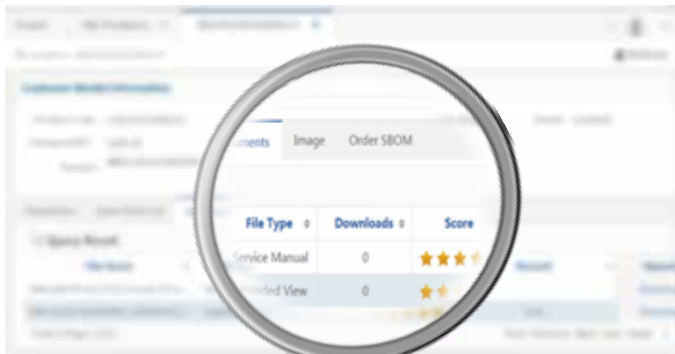

Mobile Intelligence Service App (MISA)

MISA is the mobile terminal of TSP, with the same functions as TSP. The mobile service improves the response time and convenience of technical support.

<https://link.midea.com>

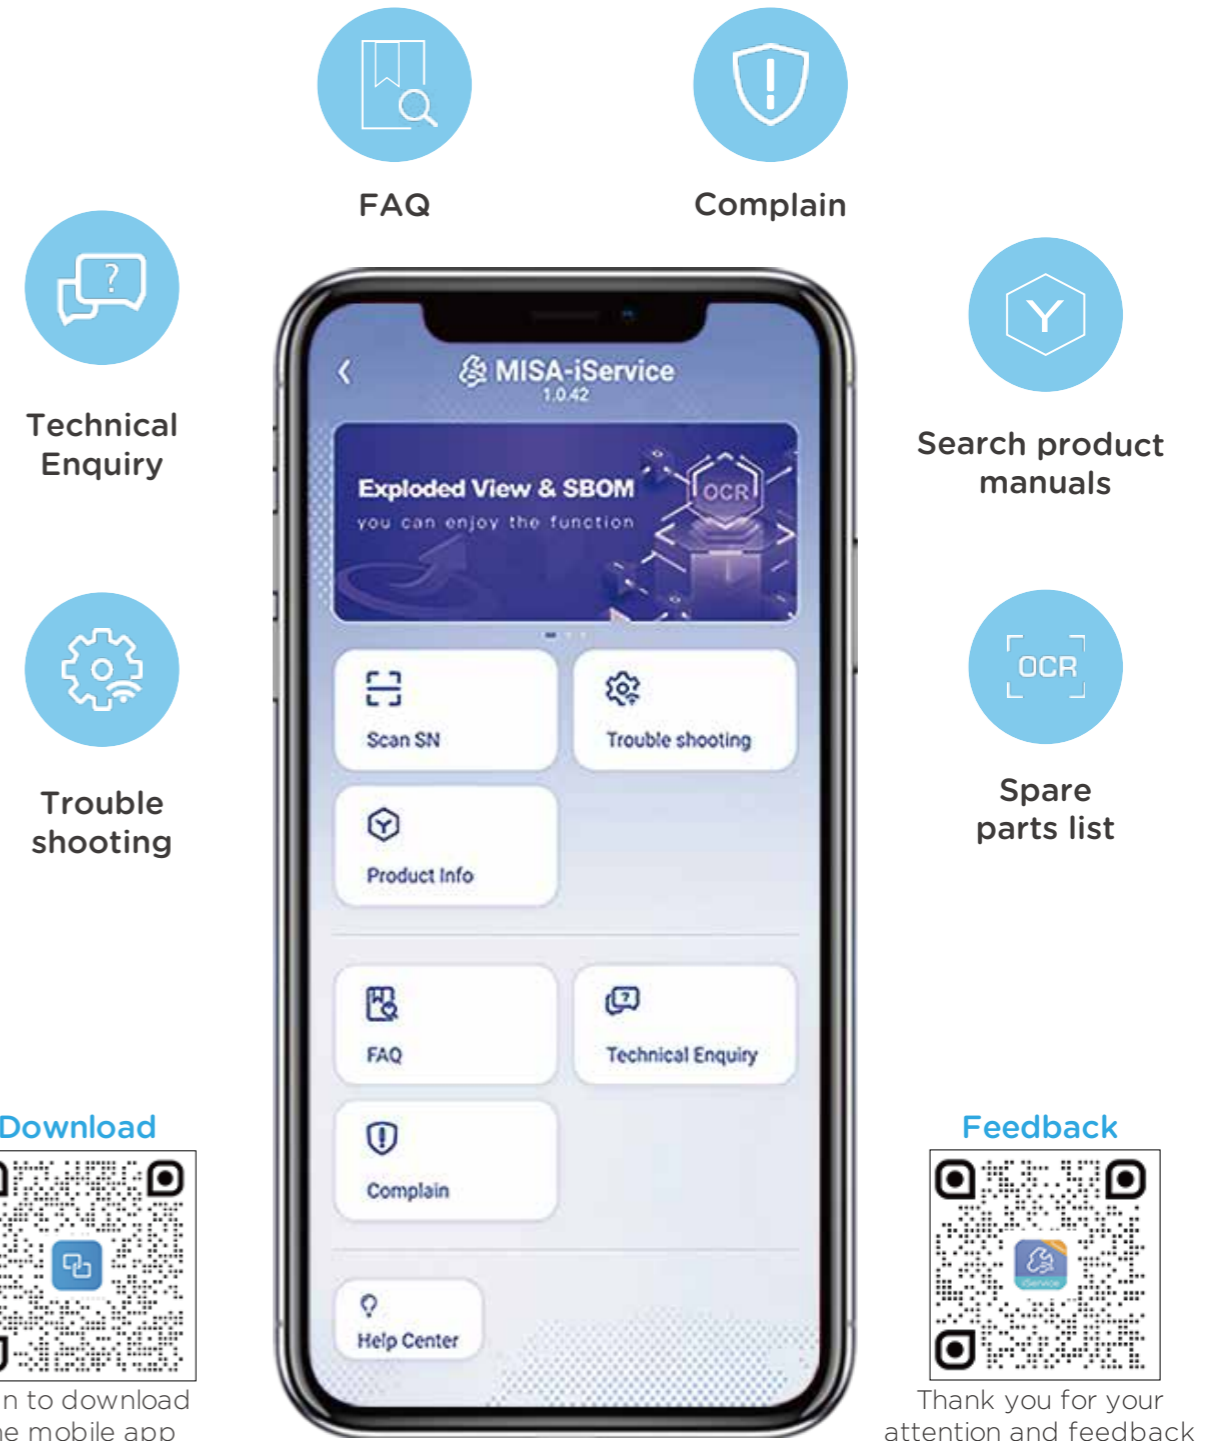

Midea Global Spare Parts Center

The global spare parts center provides high quality and fast spare parts supply. Midea's online system (<https://tsp.midea.com>) allows users to query and purchase spare parts with one click, further shortening the supply time of spare parts.

The “**2** (HQ spare parts center) + **10** (Regional spare parts center) + **N** (Country spare parts inventory)” Spare Parts Layout can ensure the timely supply of after-sales spare parts around the globe.





 **OUTDOOR UNITS**

V8 Mini VRF

The V8 Mini

Series VRF uses algorithms and self-learning technology to monitor the operation of the equipment, so that the equipment can run stably and be maintained in time to ensure that the equipment always runs in optimal condition throughout its life cycle.

V8 Mini VRF Lineup

Outdoor Unit

8-18kW	12-18kW
	
220-240V~ 50Hz	380-415V 3N~ 50Hz

Indoor Unit

One-way Cassette	Two-way Cassette	Compact Four-way Cassette
		

Four-way Cassette	Arc Duct	Medium Static Pressure Duct
		

High Static Pressure Duct	Wall Mounted	Ceiling & Floor
		
		Note: It should be ceiling installation to meet regulatory requirements.


Fresh Air Processing Unit


Note: R32 V8 Mini can only available with V8 indoor units. The indoor unit must be installed at a height of 1.8m or more.

Outdoor Unit Functions

Functions			V8 Mini
●: equipped as standard; O: customization option			
Key Technologies	HyperLink	Midea's original communication bus chip greatly simplifies installation and saves installation costs	●
	M-Holmes	Reduces installation space constraints and increases the safety of the R32 V8 Mini	●
	SuperSense	13 sensors monitor the state of each part of the refrigerant pipeline throughout the whole process	●
	Meta 2.0	Triple variable control maximizes comfort and energy efficiency	●
	Zen air 2.0	Provides comfort and healthy air supply	●
	Doctor M 2.0	Intelligent diagnostic technology makes maintenance easier and more efficient	●
High Efficiency	Full DC inverter technology	All electrical components of outdoor and indoor units use DC power supply, improving electrical efficiency and saving energy	●
	Advanced subcooling technology	The refrigerant system can achieve 15°C refrigerant subcooling, which can further improve the refrigerant heat transfer efficiency while reducing noise	●
	Low standby power consumption	The standby power consumption is as low as 3.5W	●
	60-step energy management	The system can be set from 40% to 100% capacity output in 1% increments	●
	Sensor backup	If one sensor fails, the virtual sensor provides backup so that the system can continue operating	●

Functions			V8 Mini
●: equipped as standard; ○: customization option			
High Reliability	Precise oil control	Ensures all outdoor compressor oil is at a safe level, eliminating compressor oil shortages	●
	Heavy anti-corrosion protection	Can be customized with heavy anti-corrosion treatment for surface protection against corrosive air, acid rain and saline air (for installations in coastal regions) to extend overall useful life	○
	UL anti-corrosion certificate	It has been certified by UL that our VRF outdoor unit can withstand 27 years of simulated severe corrosion under a salt contaminated traffic environment	○
	Refrigerant cooling PCB	Guarantees stable and safe operation of the control system	●
	Chassis electrical heater	Prevents condensation on the chassis from freezing in winter	○
	Alarm output	In the event of system malfunction, remotely output error information and remind maintenance personnel to conduct maintenance	●
	Fire alarm input	In the event of fire, receive fire information in time and stop the system immediately to avoid serious problems	●
	Silent mode	5-step silent mode selections provide more freedom and convenience to match the needs of customers	●
	Intelligent defrosting technology	Calculates the time required for defrosting according to the actual system status, eliminating heat losses from unnecessary defrosting	●
	Auto cooling-heating changeover	Automatically selects cooling or heating mode to achieve the set temperature (available in changeover priority mode)	●

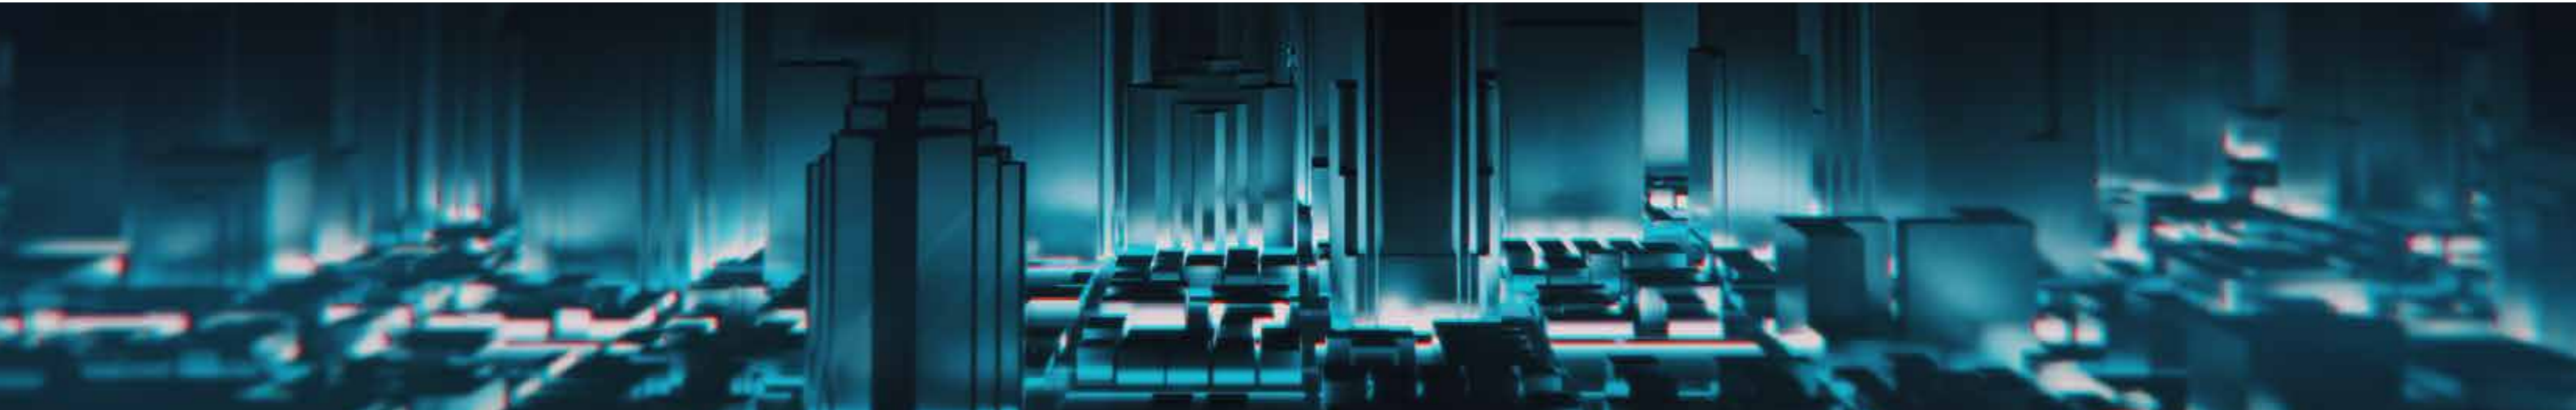

Outdoor Unit Functions

Functions			V8 Mini
●: equipped as standard; O: customization option			
Enhanced Comfort	Additional ambient temperature sensor	The additional external ambient temperature sensor can detect the true outdoor ambient temperature, correctly judge whether the system is running in cooling or heating in auto priority mode, ensuring indoor comfort	O
	0.1 °C control precision	Control precision of the sensor can reach 0.1°C, ensuring less fluctuations in room temperature	●
	Multiple priority modes	10 priority modes meet the requirements of all scenarios	●
Wide Application Range	Wide capacity range	Meets the requirements of some residential and light business scenarios	8-18kW
	Wide range of indoor units	Provides a variety of types of VRF indoor units to meet different application scenarios	●
	Wide operation range	Operates stably under extreme conditions	-15-52°C (C) -20-30°C (H)
	Long piping capability	Benefits for the system design, installation flexibility, as well as the less installation cost	●
	Auto addressing	Distributes addresses to indoor units automatically, simplifying the installation	●
	Automatic refrigerant recycling	Refrigerant can be recycled to ODU or IDUs, making the maintenance easier and more efficient	●
	Bluetooth module	It can be used for fault information storage, operation parameter enquiry, system parameter setting, quick after-sales PCB replacement, programme upgrade for indoor and outdoor units, etc., simplifying installation and maintenance.	O
	Digit display	4 digit 7-segment display can be intuitive for parameter setting, parameter checks and error checks	●

Functions			V8 Mini
●: equipped as standard; O: customization option			
Easy Installation And Service	High external static pressure	Up to 35Pa ESP allows easy handling in a variety of installation environments	●
	Arbitrary topology of communication wire	Supports any communication topology, greatly simplifies installation and reduces installation cost	●
	2-core non-polarity communication wiring between the indoor and outdoor units	Simplifies installation and reduces wiring failures	●
	Long communication wiring	Communication wiring up to 2000m makes installation more flexible	●
	Wide combination ratio	Combination ration can be extended to 50%-160% under certain conditions which can meet different project requirements(R32 V8 Mini can only available with V8 indoor units)	●
	Supports manual and automatic defrosting	Improves maintenance efficiency	●
	Supports manual and automatic oil return	Improves maintenance efficiency	●
	Easy software program upgrade*	The software program can be upgraded via on-site USB and burning, or remotely via the web	●
	Flexible controller connection	Central controller and BMS gateway can connect to the ODU at the same time, and the central controller can connect to the ODU or IDU	●
	Easy system commissioning and checking*	System commissioning and checking can easily be completed on-site or remotely via the web	●
Intelligent maintenance tool	Intelligent bluetooth after-sales kit can simplify maintenance and improve maintenance efficiency	○	

Note:
*: The web function needs to be realized through the data cloud gateway, and the data cloud gateway needs to be purchased separately.



INNOVATIVE

TECHNOLOGIES



HyperLink New & Unique

SuperSense New & Unique

M-Holmes New & Unique

 **ETA 2.0**

 **ENair 2.0**

DOCTOR m. 2.0

HyperLink

Midea's original communication bus chip greatly simplifies installation and saves installation costs.



Benefits


- Flexible installation
- Low installation cost
- High reliability
- Stable operation

HyperLink communication technology supports any wiring pattern rather than just daisy chain connection, reducing installation costs and the possibility of an incorrect connection. It has stronger anti-interference ability, achieving a communication distance of up to 2000m.

Arbitrary Topology Communication



In addition to the traditional daisy chain connection, the communication wire supports tree connection, star connection, ring connection and so on. The wiring is flexible, which greatly reduces installation costs and has no possibility of wrong connection on site.

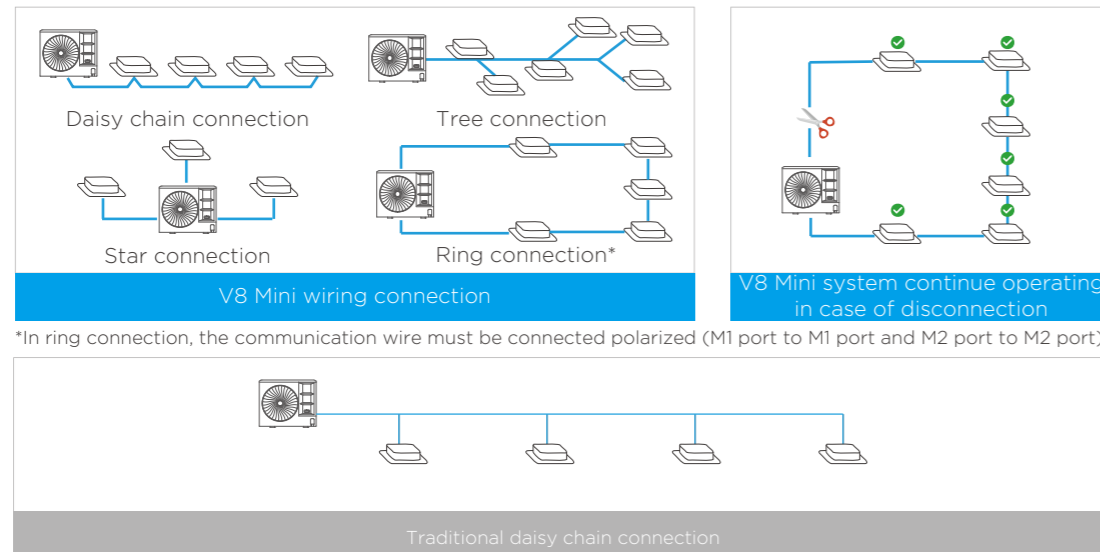


*In ring connection, the communication wire must be connected polarized (M1 port to M1 port and M2 port to M2 port).

*In ring connection, the communication wire must be connected polarized (M1 port to M1 port and M2 port to M2 port).

Super Anti-interference Capability

Special waveform restoration technology enhances anti-interference performance for more stable communication.

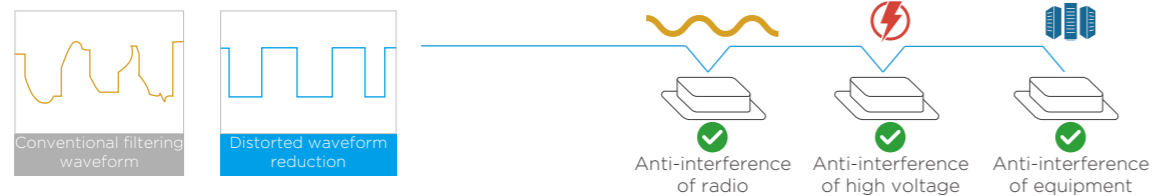

M-Holmes

M-Holmes technology reduces installation space constraints and increases the safety of the R32 V8 Mini.




Benefits

- Safety
- Timely reminders
- Refrigerant recovery

With the optional M-Holmes technology (refrigerant shut-off device, alarm device and refrigerant leak sensor), timely detection, alarm and alert of refrigerant leaks can be achieved, making the entire operating system safer. It is also possible to reduce room size restrictions and adapt to more installation scenarios.

Refrigerant Shut-off Device

The shut-off device is installed on the outdoor unit side, which can automatically recover the refrigerant to the outdoor unit after the refrigerant leakage and keep the refrigerant safely.

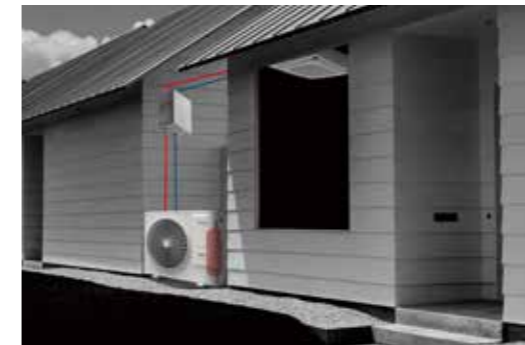

*The shut-off device must be purchased from Midea

Alarm Device

When a refrigerant leak is detected in the system, the alarm device will alert you in time.



Refrigerant Leakage Sensor

The refrigerant leak sensor is installed on the indoor unit side to detect refrigerant leaks and can automatically activate alarm measures.



*The refrigerant leak sensor must be installed at 1.5m above the floor.

Cloud-based Remote Alerts

Midea V8 Mini VR transmits system operation data to the cloud in real time through the data cloud gateway, and alerts users in time by email if there is refrigerant leakage, minimizing hidden dangers.



SuperSense

The status of the refrigerant can be determined throughout the process, ensuring high **RELIABILITY** and **COMFORT**.




Benefits

-  High reliability
-  Stable operation
-  Enhanced comfort

Up to 13 sensors are distributed throughout the refrigerant system, and the status of the refrigerant can be determined throughout the process, ensuring stable operation. At the same time, combined with the digital twin technology of the refrigerant system, a virtual sensor can be created in the event of a physical sensor failure, so that the system does not shut down in the event of a sensor failure, ensuring comfort.

Complete Sensors

The V8 Mini VRF has up to 13 condition sensors with built-in data models for compressors, heat exchangers, throttling components and more. By analyzing sensor data in real time, it can sense the status of the refrigerant anywhere in the system.

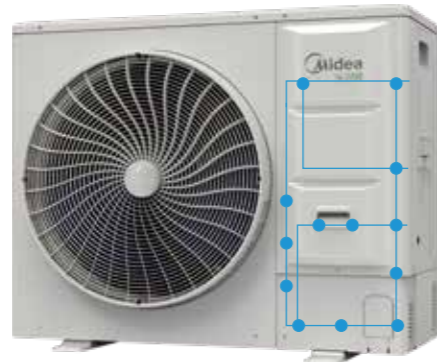

Virtual Sensor Backup

In the event of a sensor failure, other sensors can automatically simulate a virtual backup sensor, so that the VRF system can continue to operate without stopping.



New & Unique

Midea ETA (META) 2.0

META is the abbreviation of Midea Evaporating Temperature Alteration. Further upgraded META technology to maximize **ENERGY SAVING**.

Aëta



Benefits

-  Energy saving
-  Enhanced comfort
-  Fast cooling/heating

Built-in professional operation and maintenance algorithm, so that the annual operation energy efficiency of each set of systems is increased by more than 28%.



Variable Refrigerant Flow

STEP 1: Architectural space feature recognition

The indoor unit automatically recognizes the size of the building space and the effectiveness of the insulation according to the rate of temperature drop.



Refrigerant flow coordination



Automatic calculation of the building load and the required refrigerant quantity based on the sensor parameters.



Variable Refrigerant Temperature

STEP 2: System refrigerant temperature determination

The system automatically matches the evaporating temperature (in cooling) or condensing temperature (in heating) to the room load to maximize comfort and energy efficiency.



Load

Refrigerant temperature

Automatic matching of the corresponding refrigerant temperature to the load.



Variable Indoor Airflow



STEP 3: Adaptive indoor airflow and refrigerant flow

Each indoor unit automatically adjusts the corresponding indoor airflow and refrigerant flow according to the evaporating/condensing temperature, enabling precise temperature control.

7 fan speeds



Automatic matching of the corresponding indoor airflow to the load and refrigerant temperature.

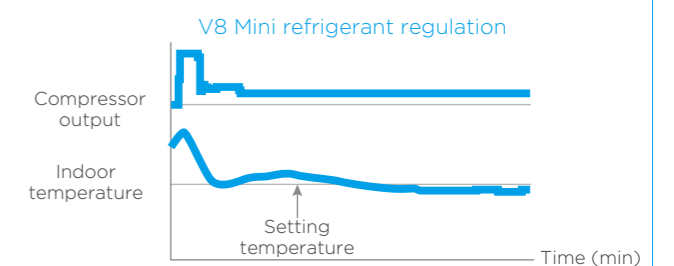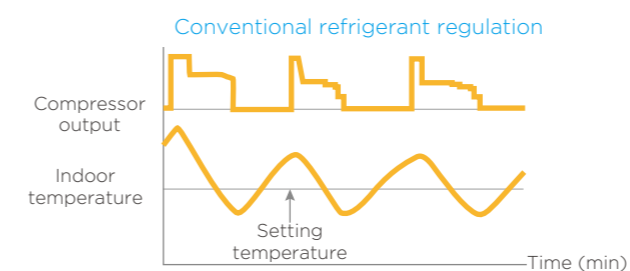

Zen Air 2.0

Further upgraded ZEN AIR technology to maximize **COMFORT**.



Benefits



Quiet



Enhanced comfort




Healthy

0.5°C temperature adjustment, 7 fan speeds selection, sleep mode, silent mode, windless technology, high efficiency filter, a variety of sterilization devices and other advanced technologies used in V8 Mini Series VRF are dedicated to creating a quiet, comfortable and healthy indoor environment.


360° Airflow

New design, round air flow path ensures uniform air flow and temperature distribution.

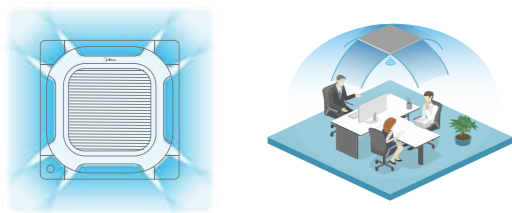


Individual Louver Control

The Individual louver control can control the motors separately, making it possible to control all four louvers independently.



Long Distance Air Delivery*

The Four-way Cassette has an additional 50Pa of static pressure for long airflow delivery and can be used in spaces of up to 4.5m in floor height.

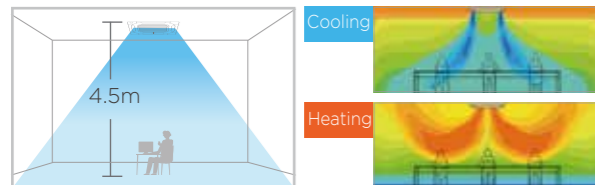

*This function is available as a customization option.


7 Fan Speeds

7 indoor fan speed options to meet the needs of different indoor conditions.



Sleep Mode


The smart sleep mode provides a comfortable sleep period and a refreshing wake up time.

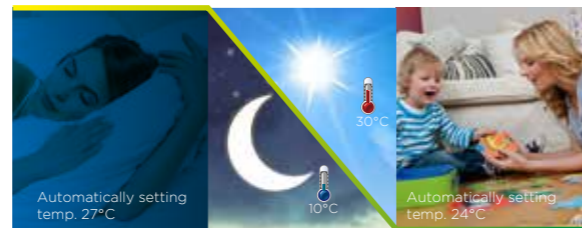

*Temperature on left is for reference.

Heat Exchanger Self-cleaning

Wash the dirt on the heat exchanger through freezing frost, and then high temperature sterilization.

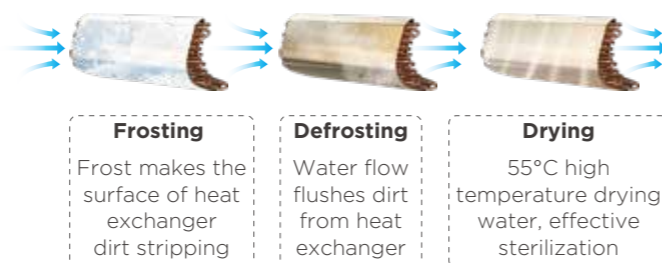

Frosting

Frost makes the surface of heat exchanger dirt stripping

Defrosting

Water flow flushes dirt from heat exchanger

Drying

55°C high temperature drying water, effective sterilization

Doctor M 2.0

Further upgraded DOCTOR M technology to maximize **EASY SERVICE**.



Benefits



Easy maintenance



Fast maintenance



Low maintenance cost

Based on a cloud-based platform of big data and artificial intelligence, the V8 Mini Series VRF can monitor the operation status of each unit in real time, predict system faults in advance and provide data analysis for system maintenance. The intelligent Bluetooth module and special Bluetooth after-sales kit can further simplify maintenance and improve maintenance efficiency.

Intelligent Maintenance Tool

With the intelligent Bluetooth module or special Bluetooth after-sales kit, the data of the outdoor unit can be directly read and written on your smart phone without connecting a PC or opening the cabinet.



Bluetooth after-sales kit

* Bluetooth module is available as a customization option.

Real-time Monitoring of Operating Parameters

The V8 Mini Series VRF synchronizes and stores all the unit parameters to the cloud through the data cloud gateway, including the running status, locking status, dirty blocking rate, all spot inspection parameters and so on. Users can query real-time and historical parameters on computers, tablets and mobile phones at any time.



*The data cloud gateway needs to be purchased separately.

Cloud-based Big Data Analytics

Midea V8 Mini Series VRF transmits the system operation data to the cloud in real time through the data cloud gateway, and timely reminds the system of abnormal conditions through big data analysis, helping users to proactively avoid the risk of failure that has not yet occurred and minimize hidden problems.




High Efficiency

Full DC Inverter Technology

The V8 Mini VRF uses full DC inverter compressor and fan motor to achieve high precision stepless speed adjustment according to system operation, and ensures that the system is always in optimum condition, operating more efficiently, more consistently and with less noise.


Full DC Inverter for Outdoor Components

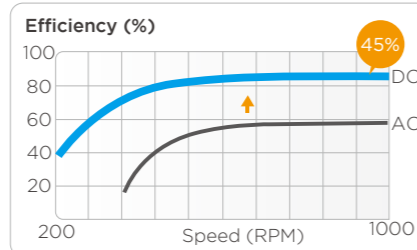

Wider frequency adjustment range

Faster cooling and heating

Higher energy efficiency

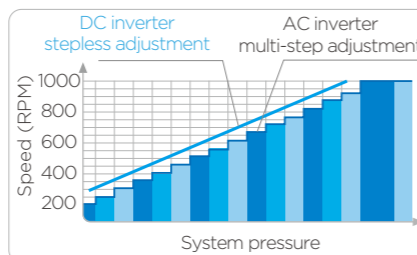


All power devices such as indoor fan motor, drain pump and electric control board are fully DC, which increases electrical efficiency by 20% and results in more accurate temperature control, a more constant indoor temperature and higher energy efficiency.



Full DC Inverter for Indoor Components



20%
Efficiency
improvements




VS

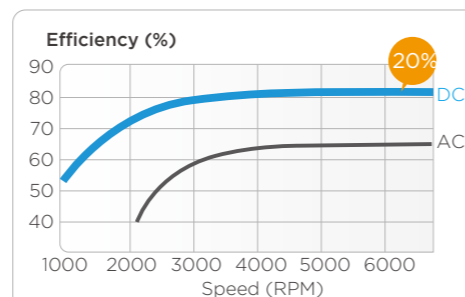


Advanced Subcooling Technology

The V8 Mini VRF uses a plate heat exchanger to further cool the refrigerant and the refrigerant system can achieve 15°C refrigerant subcooling, which can further improve the refrigerant heat transfer efficiency while reducing the sound of refrigerant flow.

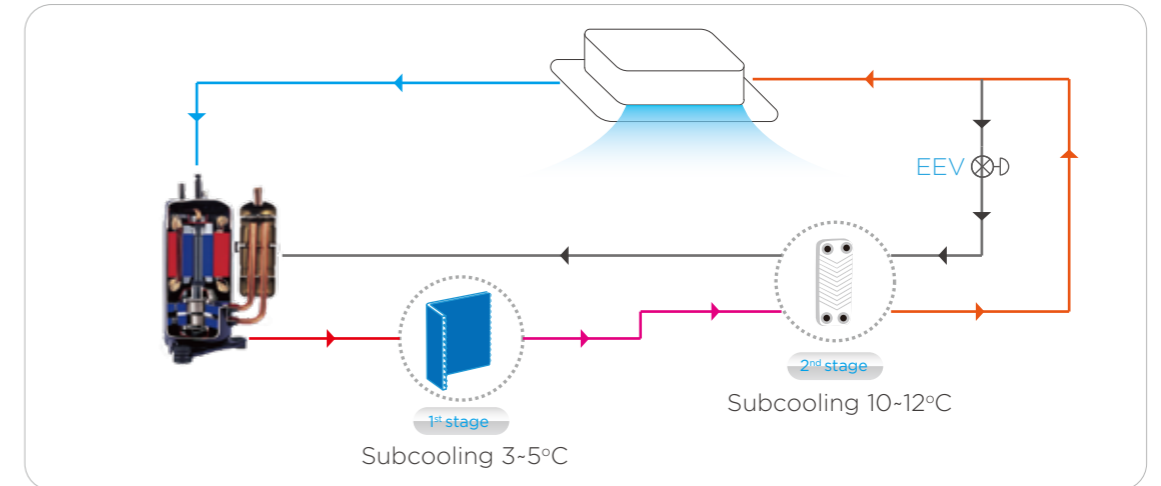


Low Standby Power Consumption

Compared to the standby power consumption of traditional VRF of about 30W, the V8 Mini VRF uses optimized control scheme to further reduce standby power consumption to as low as 3.5W.

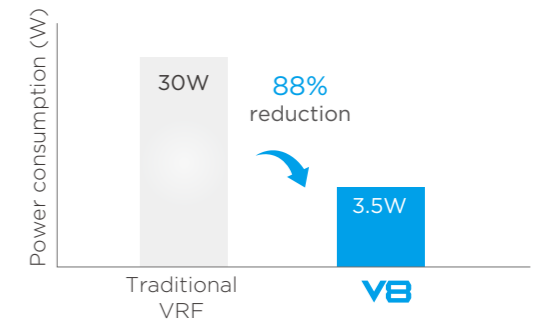

60-step Energy Management


For projects with temporary electricity supply restrictions, the outdoor unit supports 60-step energy management which can be set to output 40-100% capacity in 1% increments. It prevents tripping during conditions of restricted electricity supply and allows the system to continue to operate.

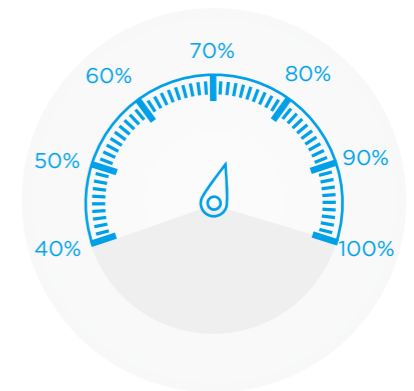

High Reliability

Sensor Backup

Through digital algorithms, each physical sensor generates a corresponding virtual sensor that acts as a backup to each other, ensuring that the failure of one sensor does not affect the normal operation of the system.

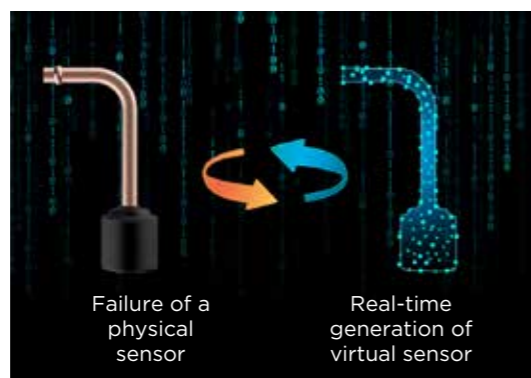

SuperSense


V8 Mini VRF uses up to 13 sensors for each outdoor unit and 4 sensors for each indoor unit. The operating status of the system refrigerant is clearly visible, which can achieve intelligent analysis of operation parameters, intelligent error diagnosis and forecasting, and visualized energy saving.



Precise Oil Control


Three stages of oil control technology ensure all outdoor compressor oil is always kept at a safe level, eliminating any compressor oil shortage problems.

1




Compressor internal oil separation.

2



High-efficiency centrifugal oil separator (with separation efficiency of up to 99%) ensures that oil is separated from the discharge gas and returned to the compressors in a timely fashion.

3



The automatic oil return program determines the oil return through the running time and the oil discharge amount, enabling precise oil return.

Heavy Anti-corrosion Protection*

Standard outdoor units are given anti-corrosion treatment for non-extreme conditions and can also be customized with heavy anti-corrosion treatment on main components for surface protection against corrosive air, acid rain and saline air (for installations in coastal regions) to extend overall useful life. The integrity of the anti-corrosion treatment is ensured by subjecting major components and parts to salt mist testing, moisture and heating testing and light aging testing.



*Heavy anti-corrosion treatment is available as a customization option.

UL Anti-Corrosion Certificate*

It has been certified by UL that our VRF outdoor unit can withstand 27 years of simulated severe corrosion under a salt contaminated traffic environment.

*UL anti-corrosion certificate is available for heavy anti-corrosion treatment units.


Outdoor Unit can resist 27 years of simulated severe corrosion under a salt contaminated traffic environment



Enhanced Comfort

Advanced Silent Technology


5-step silent mode provide more freedom and convenience to match the customer needs.

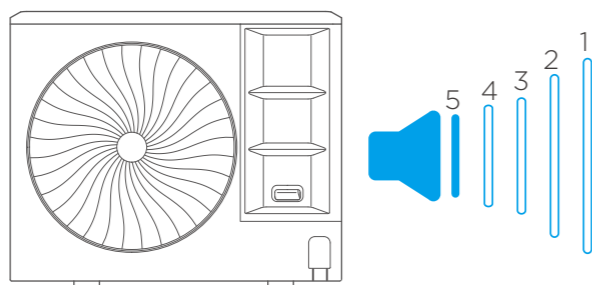

5 silent options

Auto Cooling-heating Changeover

Automatically selects cooling or heating mode to achieve the set temperature.

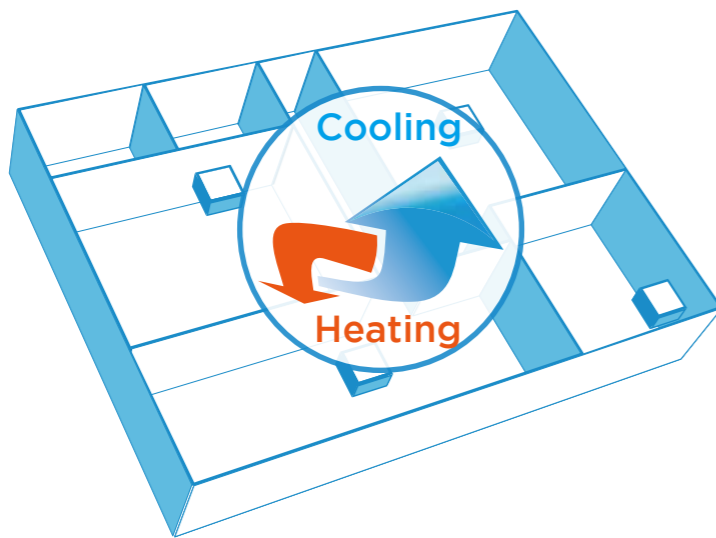

10 Priority Modes


10 priority mode options provide more freedom and convenience to match the customer needs.



Additional Ambient Temperature Sensor*

The V8 Mini VRF can be equipped with an additional external ambient temperature sensor to determine whether the system is operating in cooling or heating in auto priority mode. For some installations, the ambient temperature sensor fixed on the unit cannot detect the true ambient temperature, resulting in the system operating in an inappropriate mode and affecting indoor comfort. The external ambient temperature sensor can detect the true outdoor ambient temperature, and correctly judge whether the system is running in cooling or heating mode, ensuring indoor comfort.

*This function is available as a customization option.

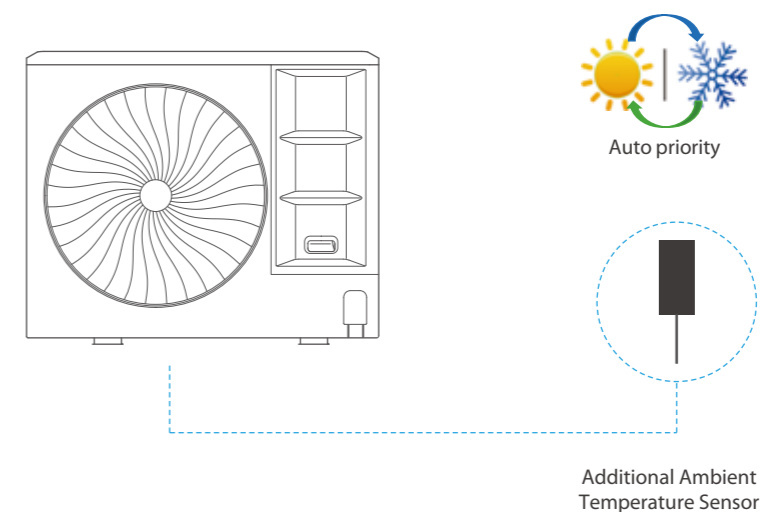

Wide Application Range

Wide Capacity Range

The capacity of V8 Mini VRF is from 8kW to 18kW with two power supply options, which are perfectly suitable for all kinds of small and medium-sized buildings.

8-18kW



220-240V~ 50Hz

12-18kW



380-415V 3N~ 50Hz


Wide Range of Indoor Units

The V8 Mini VRF offers a variety of types of indoor units to meet different scenarios of applications such as offices, villas, restaurants, etc.



Wide Operation Range


Thanks to the refrigerant cooling technology, the electronic components are always working in a safe temperature range. The system can operate stably at extreme temperature range from -20°C to 52°C.

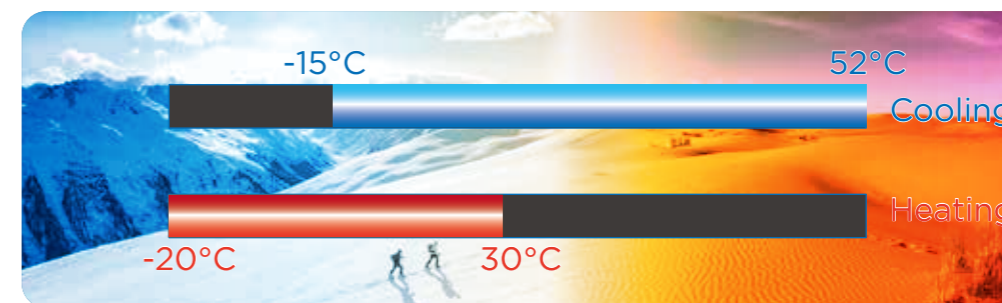

Long Piping Capability

The V8 Mini VRF can support a total piping length of up to 300m, an installation height difference of up to 50m between indoor and outdoor units, and up to 15m between indoor units, making the V8 Mini VRF perfectly suitable for small and medium-sized buildings.

Piping length / Height difference		Capability (m)	
		8-10kW	12-18kW
Total piping length		150	300
1. Longest piping length	Actual	50	100
	Equivalent	60	120
2. Longest piping length after first branch		30	40
3. Largest level difference between IDUs and ODU	ODU up	30	50
	ODU down	20	40
4. Largest level difference between IDUs		15	15

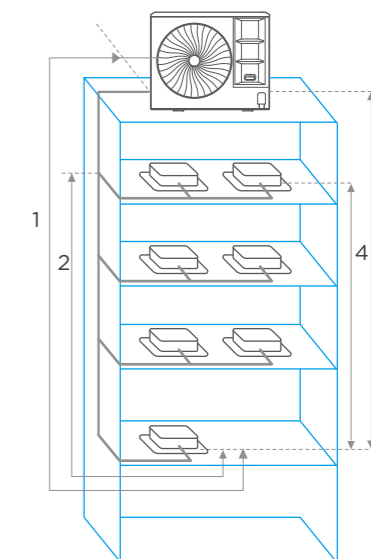

Easy Installation and Service


Free Wiring

HyperLink communication technology supports any wiring pattern rather than just daisy chain connection, reducing the installation cost and the possibility of incorrect connection. It has stronger anti-interference ability, achieving a communication distance of up to 2000m.




Space Saving

One Mini VRF outdoor unit can connect 1 to 12 indoor units, which greatly saves the installation space of outdoor units and retains buildings' original aesthetics. Compared to the traditional split AC. It is very suitable for use in residential and light commercial scenarios, such as villas, restaurants, small and medium-sized supermarkets, etc.

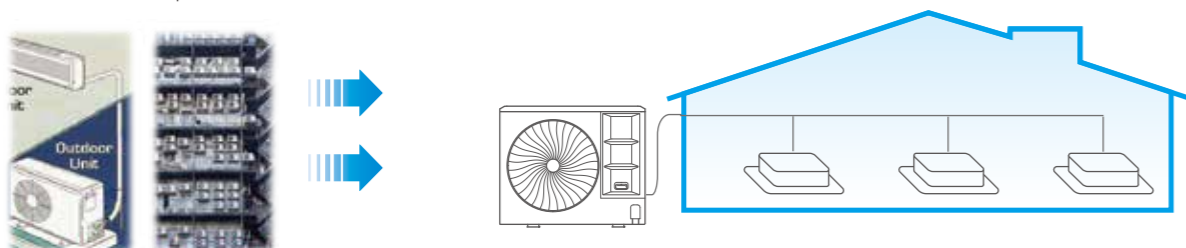


Auto Addressing

Addresses for all indoor units can be assigned automatically by the V8 Mini system, further simplifying installation.

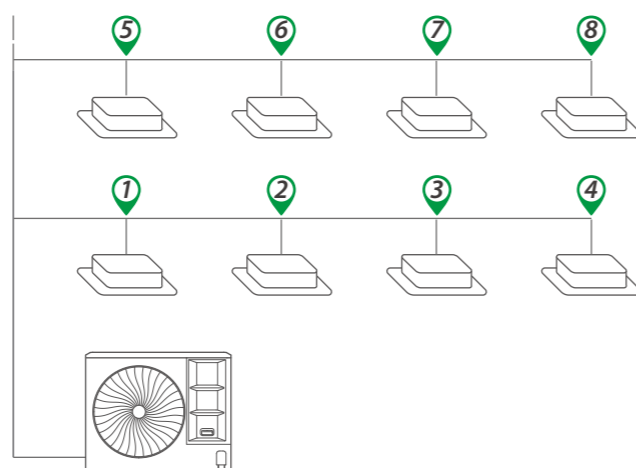

Flexible Pipe Connection

A four-direction space is available for connecting pipes and wiring in various installation sites.

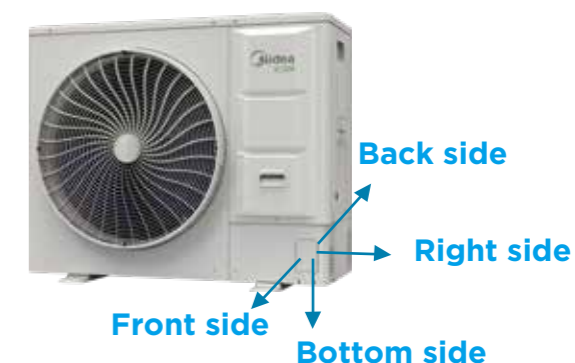

35Pa External Static Pressure

The 35Pa static pressure increases flexibility in the choice of the unit's installation point. Strong heat dissipation can be maintained even when the outdoor unit is covered.




Easy Transportation

V8 Mini can be transported by elevator which makes installation dramatically easy, and effectively reduces time and labor thanks to the small size.




Automatic Refrigerant Recycling

When an indoor unit fails, the refrigerant can be recycled into the outdoor unit. When the outdoor unit fails, the refrigerant can be recycled into the indoor units. Two types of refrigerant recycling make the maintenance process easier and more efficient.

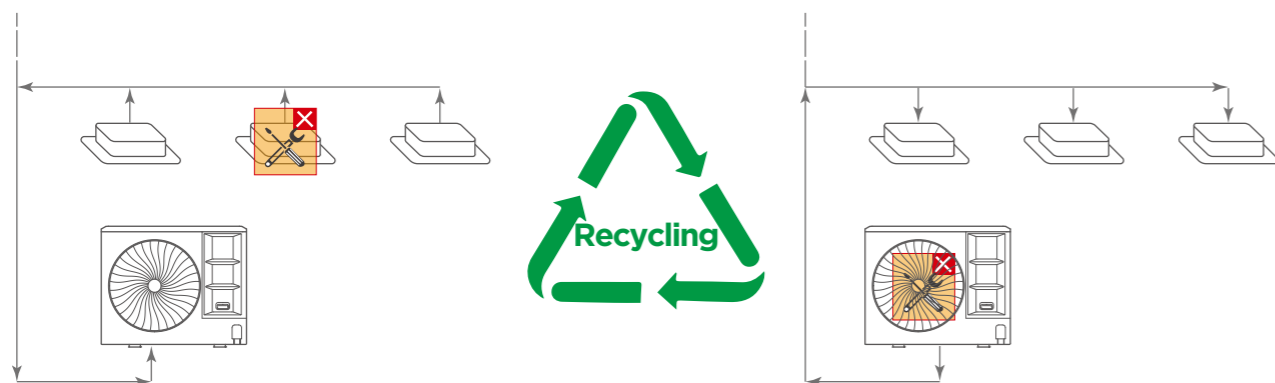

Wide Combination Ratio

Compared to traditional Mini VRF with combination ratio of 50-130%, the V8 Mini VRF can be extended to 50-160%, and the wider combination ratio allows for more flexible system configuration. The larger combination ratio can be applied to long-term part-load operation scenarios, allowing for further reduction in installation costs.

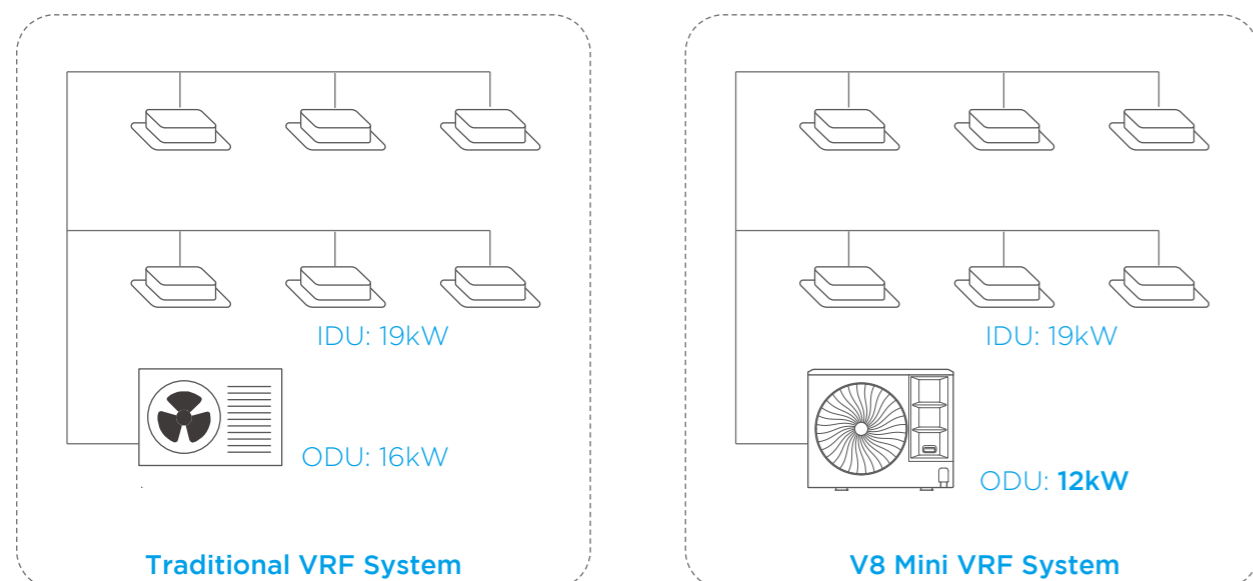

Easy Software Program Upgrade

In addition to upgrading the program of outdoor and indoor units through USB and burner, the new product can also remotely upgrade all the programs of indoor and outdoor units through the data cloud gateway, making system upgrades very convenient and ensuring that the system program is always up to date.

*The data cloud gateway needs to be purchased separately.




Smart Commissioning/Maintenance Tool

With the newly developed smart tool (Bluetooth module and special Bluetooth after-sales kit), system settings, operating parameter queries, trial runs and programme upgrades are all possible without opening the cabinet.


Useful in the following situations:

- Installation
- Service maintenance

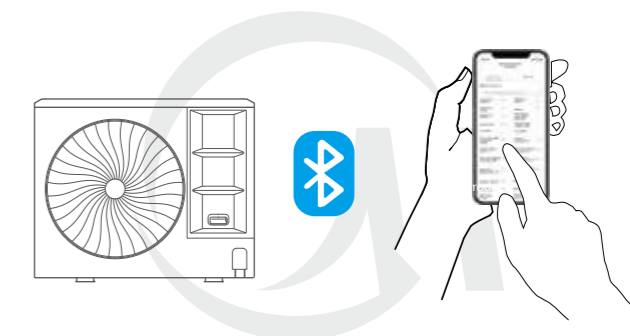

Main functions:

- Fault information storage
- Operating parameters query
- Start commissioning test run
- System parameter setting
- Quick after-sales PCB replacement
- Equipment control
- Indoor and outdoor units programme upgrade

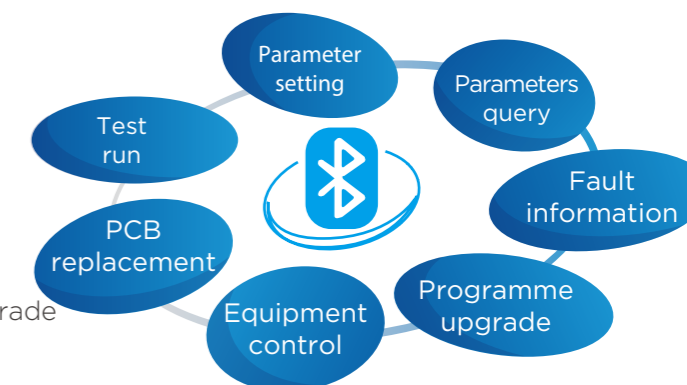

Specifications

V8 Mini 220-240V~ 50Hz

Model			MV8M-80WV2N8	MV8M-100WV2N8	MV8M-120WV2N8
Power supply		V/N/Hz	220-240/1/50		
Cooling ¹	Capacity	kW	7.2	9.0	12.3
		kBtu/h	24	30	41
	Power input	kW	1.95	2.77	3.73
	EER		3.70	3.25	3.30
	SEER		5.80	5.70	7.80
Heating (Rated) ²	Capacity	kW	7.2	9.0	12.3
		kBtu/h	24	30	41
	Power input	kW	1.80	2.31	2.86
	COP		4.00	3.90	4.30
Heating (Max) ²	Capacity	kW	9.0	10.8	14.0
		kBtu/h	30	36	47
	Power input	kW	2.50	3.18	3.59
	COP		3.60	3.40	3.90
	Connected indoor unit	Total capacity		50%-160% of ODU capacity	
Compressor	Maximum quantity		5	6	8
Fan motor	Type		DC inverter		
	Quantity		1		
	Type		DC		
	Quantity		1		
	Airflow rate	m ³ /h	5200	5200	5000
Refrigerant	Static pressure	Pa	0-35 (standard)		
	Type		R32		
	Factory charge	kg	2	2	2.85
Pipe connections ³	Gas pipe	mm	15.9	15.9	15.9
	Liquid pipe	mm	9.52	9.52	9.52
Sound pressure level ⁴		dB(A)	53	53	55
Sound power level ⁴		dB(A)	68	69	70
Net dimensions (W×H×D)		mm	1038×864×409	1038×864×409	1038×864×409
Packed dimensions (W×H×D)		mm	1120×980×560	1120×980×560	1120×980×560
Net weight		kg	77	77	94
Gross weight		kg	88	88	105
Ambient temp.	Cooling	°C(DB)	-15-52	-15-52	-15-52
operation range	Heating	°C(DB)	-20-30	-20-30	-20-30

Model			MV8M-140WV2N8	MV8M-160WV2N8	MV8M-180WV2N8
Power supply		V/N/Hz	220-240/1/50		
Cooling ¹	Capacity	kW	14.0	15.5	17.5
		kBtu/h	47	52	59
	Power input	kW	4.67	5.34	6.46
	EER		3.00	2.90	2.71
	SEER		7.40	7.35	7.10
Heating (Rated) ²	Capacity	kW	14.0	15.5	17.5
		kBtu/h	47	52	59
	Power input	kW	3.29	3.73	4.49
	COP		4.25	4.15	3.90
	SCOP		4.80	4.80	4.80
Heating (Max) ²	Capacity	kW	16.0	17.5	19.5
		kBtu/h	54	59	66
	Power input	kW	4.21	4.73	5.57
	COP		3.80	3.70	3.50
	Connected indoor unit	Total capacity		50%-160% of ODU capacity	
Compressor	Maximum quantity		10	11	12
Fan motor	Type		DC inverter		
	Quantity		1		
	Type		DC		
	Quantity		1		
	Airflow rate	m³/h	5000	5000	5500
Refrigerant	Static pressure		Pa		
	Type		R32		
	Factory charge	kg	2.85	2.85	2.85
	Gas pipe	mm	15.9	15.9	19.1
	Liquid pipe	mm	9.52	9.52	9.52
Sound pressure level ⁴	dB(A)		56	56	58
Sound power level ⁴	dB(A)		71	72	73
Net dimensions (W×H×D)		mm	1038×864×409	1038×864×409	1038×864×409
Packed dimensions (W×H×D)		mm	1120×980×560	1120×980×560	1120×980×560
Net weight		kg	94	94	94
Gross weight		kg	105	105	105
Ambient temp. operation range	Cooling	°C(DB)	-15-52	-15-52	-15-52
	Heating	°C(DB)	-20-30	-20-30	-20-30

- Notes:
- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
 - Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
 - Diameters given are those of the unit's stop valves.
 - Sound pressure level is measured at a position 1m in front of the unit and 1m above the floor in a semi-anechoic chamber.

V8 Mini 380-415V 3N~ 50Hz

Model			MV8M-120WV2RN8	MV8M-140WV2RN8
Power supply		V/N/Hz	380-415/3/50	
Cooling ¹	Capacity	kW	12.3	14.0
		kBtu/h	41	47
	Power input	kW	3.73	4.67
	EER		3.30	3.00
	SEER		7.80	7.40
Heating (Rated) ²	Capacity	kW	12.3	14.0
		kBtu/h	41	47
	Power input	kW	2.86	3.29
	COP		4.30	4.25
	SCOP		4.90	4.80
Heating (Max) ²	Capacity	kW	14.0	16.0
		kBtu/h	47	54
	Power input	kW	3.59	4.21
	COP		3.90	3.80
	Connected indoor unit	Total capacity		50%-160% of ODU capacity
	Maximum quantity		8	10
Compressor	Type		DC inverter	
	Quantity		1	1
Fan motor	Type		DC	
	Quantity		1	1
	Airflow rate	m³/h	5000	5000
	Static pressure	Pa	0-35 (standard)	
Refrigerant	Type		R32	
	Factory charge	kg	2.85	2.85
Pipe connections ³	Gas pipe	mm	15.9	15.9
	Liquid pipe	mm	9.52	9.52
Sound pressure level ⁴		dB(A)	55	56
Sound power level ⁴		dB(A)	70	71
Net dimensions (W×H×D)		mm	1038×864×409	1038×864×409
Packed dimensions (W×H×D)		mm	1120×980×560	1120×980×560
Net weight		kg	110	110
Gross weight		kg	121	121
Ambient temp. operation range	Cooling	°C(DB)	-15-52	-15-52
	Heating	°C(DB)	-20-30	-20-30

Model			MV8M-160WV2RN8	MV8M-180WV2RN8
Power supply		V/N/Hz	380-415/3/50	
Cooling ¹	Capacity	kW	15.5	17.5
		kBtu/h	52	59
	Power input	kW	5.34	6.46
	EER		2.90	2.71
	SEER		7.35	7.10
Heating (Rated) ²	Capacity	kW	15.5	17.5
		kBtu/h	52	59
	Power input	kW	3.73	4.49
	COP		4.15	3.90
Heating (Max) ²	Capacity	kW	17.5	19.5
		kBtu/h	59	66
	Power input	kW	4.73	5.57
	COP		3.70	3.50
	Connected indoor unit	Total capacity		50%-160% of ODU capacity
Compressor	Maximum quantity		11	12
Fan motor	Type		DC inverter	
	Quantity		1	
	Type		DC	
Refrigerant	Quantity		1	
	Airflow rate	m ³ /h	5000	5500
	Static pressure	Pa	0-35 (standard)	
Pipe connections ³	Type		R32	
	Factory charge	kg	2.85	2.85
Sound pressure level ⁴	Gas pipe	mm	15.9	19.1
	Liquid pipe	mm	9.52	9.52
Net dimensions (W×H×D)	dB(A)		56	58
Net weight	dB(A)		72	73
Gross weight	mm		1038×864×409	1038×864×409
Ambient temp. operation range	mm		1120×980×560	1120×980×560
Cooling	kg		110	110
	kg		121	121
	°C(DB)		-15-52	-15-52
Heating	°C(DB)		-20-30	-20-30

- Notes:
- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
 - Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
 - Diameters given are those of the unit's stop valves.
 - Sound pressure level is measured at a position 1m in front of the unit and 1m above the floor in a semi-anechoic chamber.